

ASX ANNOUNCEMENT

30 April 2026

Further Strong Gold Results from Lwele Central

HIGHLIGHTS

- The latest re-assay results from Lwele Central drill holes further confirm significant gold mineralisation, associated with the copper, across the deposit.
- Notable new gold results (from within previously reported Cu intercepts) include:
 - 32.3m @ 0.24 g/t Au from 52.3m (LCRD008)
 - 28.4m @ 0.18 g/t Au from 176m (LWDD064)
 - 21.5m @ 0.18 g/t Au from 75.7m (LCMT002)
 - 7.4m @ 0.39 g/t Au from 20.3m (LCDD010)
 - 2.3m @ 0.77 g/t Au from 142m (HX23_4); and
 - 4.6m @ 0.49 g/t Au from 183m (LWDD062)
- These results add to the gold re-assay results reported on 16 April 2026, with several of the previously reported holes returning further new discrete intercepts reported here.
- Of the total January 2026 gold re-assay programme across 52 holes, full results remain pending for one (1) hole and partial/residual results remain pending for 14 holes.
- The widespread gold (together with in-situ cobalt) continues to point to strong potential to enhance Chilombo Copper Project economics through significant by-product credits.
- All gold re-assay results will be incorporated into an updated Indicated and Inferred Mineral Resource Estimate (MRE) for Lwele Central, expected during Q2 2026.
- Growth-focussed Phase 3 2026 drilling at Chilombo is set to commence in early May.

Halvorsen Resources Limited (ASX:HVR) (Halvorsen or the Company) is pleased to provide a further update on gold re-assaying results from the Lwele Central deposit, drawn from its Phase 1 and Phase 2 drill programmes and historical drilling at the Chilombo Copper Project (87.5% Halvorsen) (**Chilombo**) in north-western Zambia.

Halvorsen's Managing Director and CEO, Daniel Whitcombe, said:

"This new batch of gold re-assays again shows how broadly the gold is distributed through our flagship Lwele Central deposit. Gold and cobalt by-product credits give Chilombo a real opportunity to sit lower on the global copper cost curve, and each set of results strengthens our confidence in that opportunity."

"We expect the scale of the gold upside to become clearer once the updated Lwele Central MRE, which will include all of the re-assay results, is completed later this quarter."

"We remain on schedule to start Phase 3 drilling in early May. The programme will target shallower, up-dip extensions of Lwele Central to the south, test the wider 'Lwele Hub' – including Lwele West and a key conductor northeast of the Lwele South prospect – and complete first-pass scout drilling on our highest-

priority regional targets. These include the large Mbalango and Sokoshi EM conductors, each more than 1.8km in strike, which closely resemble the Lwele Central signature in scale, shape and conductivity.”

New gold re-assays received for Lwele Central

For details of the gold re-assaying programme undertaken on Lwele Central over recent months, refer to the Halvorsen ASX release dated 16 April 2026, *Gold Assays Confirm By-Product Upside at Lwele Central*.


This release outlines significant gold results received from the next batch of re-assay samples, which comprises samples from across 44 re-assayed holes (some of which had partial results previously reported on 16 April 2026) (see Figure 1 for hole locations). Notable new intersections returned (from within previously reported copper intercepts) include:

- 32.3m @ 0.24 g/t Au from 52.3m (LCRD008)
- 28.4m @ 0.18 g/t Au from 176m (LWDD064)
- 21.5m @ 0.18 g/t Au from 75.7m (LCMT002)
- 7.4m @ 0.39 g/t Au from 20.3m (LCDD010)
- 2.3m @ 0.77 g/t Au from 142m (HX23_4)
- 4.6m @ 0.49 g/t Au from 183m (LWDD062)
- 3.51m @ 0.49 g/t Au from 104m (LCDD010); and
- 6.2m @ 0.22 g/t Au from 144m (LCDD004)

The results for two further sample batches (281 samples in total) of gold re-assaying at Lwele Central remain pending at the date of this release (being full results for one (1) hole and residual results for 14 holes).

Once all new gold assays have been received, they will be incorporated into an update of the existing Indicated and Inferred MRE for Lwele Central. The significant by-product gold distribution (along with cobalt) at the flagship Lwele Central deposit has the potential to materially enhance the forecast economics of Chilombo, strongly complementing the large-scale copper resources already defined there.

Full details, including all collar locations and drillhole data relevant to this ASX release, are tabulated in Appendix 1. A full set of significant gold drilling intersections (and associated copper intersections) for this release is tabulated in Appendix 2.

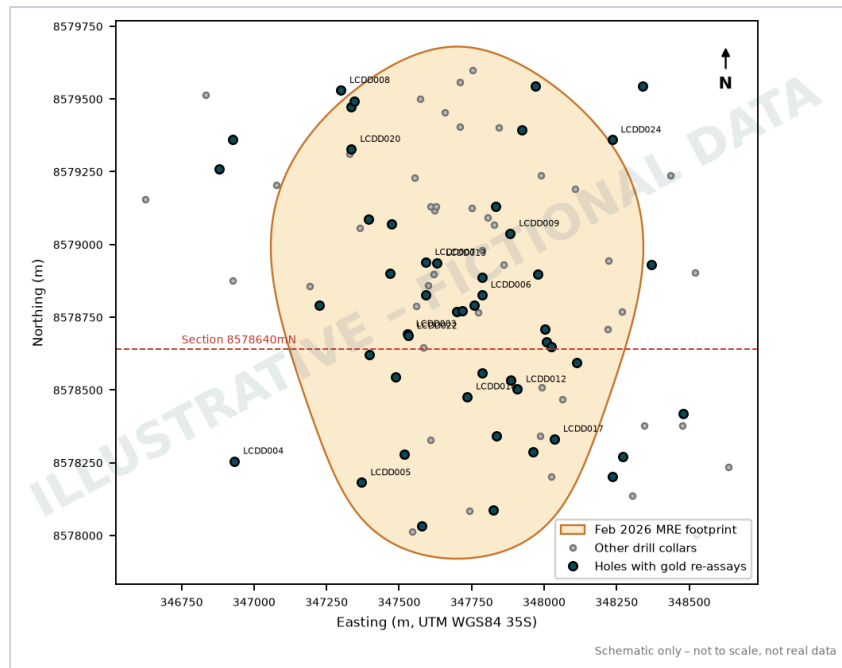

ILLUSTRATIVE FIGURE – FICTIONAL DATA


Figure 1. Lwele Central drill hole collar plan showing holes for which gold re-assay results are reported in this release and the areal extent of the current Mineral Resource Estimate (reported February 2026)

Phase 3 Chilombo exploration and drilling programme

The Phase 3 2026 exploration and drilling programme for Chilombo is set to commence in early May, with a strong focus on regional growth targets.

Key focus areas for this field season include:

- **'Lwele Hub' growth.** Mineral Resource extension drilling adjacent to the shallower, southern up-dip areas of the Lwele Central deposit, an initial focus on the Lwele West area (located approximately 1.8km west of Lwele Central) and targeting of a well-defined airborne geophysical conductor northeast of the Lwele South prospect (see Figure 2 for locations).
- **Key regional targets.** Geophysical IP surveying coupled with shallow aircore and RC drill testing of regional targets at Kalwanyembe, Sokoshi, Mbalango, West Kasakula and Kafwila, plus follow-up diamond drilling of key upgraded targets.
- **Technical workstreams.** Continued technical studies in support of an initial Scoping Study targeted for completion in early 2027, with a strong emphasis on further metallurgical test work for copper, gold and cobalt at Lwele Central and copper at Sampamba.

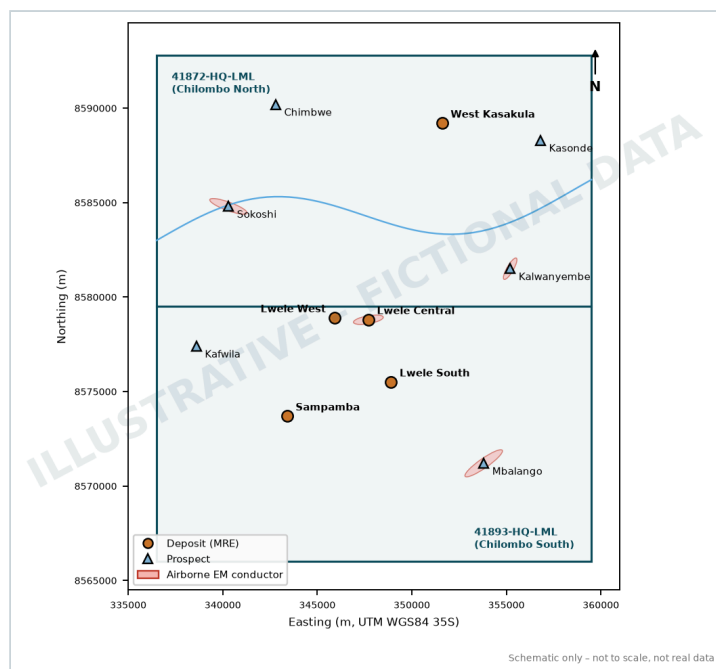

ILLUSTRATIVE FIGURE – FICTIONAL DATA

Figure 2. Chilombo Mining Licences showing the location of current prospects

This release was authorised by Daniel Whitcombe, Managing Director and CEO.

For further information, please contact:

Daniel Whitcombe

Managing Director

dwhitcombe@halvorsenresources.com.au

Priya Nandakumar

Executive Director – Finance

pnandakumar@halvorsenresources.com.au

Competent Person's Statement

The information in this announcement that relates to Exploration Results is based on information compiled by Mr Graham Keeble, a Competent Person who is a member of The Australasian Institute of Mining and Metallurgy and The South African Institute of Mining and Metallurgy. Mr Keeble is the Company's Chief Geologist. Mr Keeble has sufficient experience relevant to the style of mineralisation and type of deposit under consideration and to the activity he is undertaking to qualify as a Competent Person (CP) as defined in the 2012 Edition of the "Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves". Mr Keeble consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

The information in this report that relates to the Chilombo Project Mineral Resources and Exploration Targets is based on information compiled by Mr Michael Treloar, a Competent Person who is a Fellow of The Australasian Institute of Mining and Metallurgy (FAusIMM (CPGeo)). Mr Treloar is a full-time consultant with Treloar Resource Geology (Perth, WA). Mr Treloar has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Treloar consents to the inclusion in the report of the matters based on his information in the form and context in which it appears.

Halvorsen confirms it is not aware of any new information or data which materially affects the information included in the original market announcements. Halvorsen confirms the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcements.

Caution Regarding Forward-Looking Information

This announcement may contain some references to forecasts, estimates, assumptions and other forward-looking statements. Although the Company believes that its expectations, estimates and forecast outcomes are based on reasonable assumptions, it can give no assurance that they will be achieved. They may be affected by a variety of variables and changes in underlying assumptions that are subject to risk factors associated with the nature of the business, which could cause actual results to differ materially from those expressed herein. All references to dollars (\$) and cents in this announcement are in Australian currency, unless otherwise stated. Investors should make and rely upon their own enquiries before deciding to acquire or deal in the Company's securities.

About Halvorsen Resources Limited (ASX: HVR, FRA: 3HV)

Halvorsen Resources Limited (ASX: HVR, FRA: 3HV) is an ASX listed company focused on the exploration and development of electrification and battery metals mining projects in the broader sub-Saharan African region.


About the Chilombo Copper Project

The Chilombo Copper Project (87.5% Halvorsen) (**Chilombo**) is situated in the world-class Central African Copperbelt region of north-western Zambia. Located on two granted Large Scale Mining Licences (41872-HQ-LML; 41893-HQ-LML), Chilombo covers approximately 329 square kilometres of highly prospective tenure which lies in close proximity to several major mines hosted in similar geological settings.

Halvorsen's Phase 1 drilling during 2024 validated the growth potential of the significant copper mineralisation at Lwele Central and delivered confidence in a potential future large-scale, open pit mining development at Chilombo.

Extensive Phase 2 drilling was undertaken during 2025. In February 2026, Halvorsen delivered an updated Indicated and Inferred Mineral Resource Estimate for Chilombo of 142.7Mt @ 0.49% Cu (0.54% CuEq) for 696kt contained copper.

Phase 3 drilling is expected to commence early in May 2026.

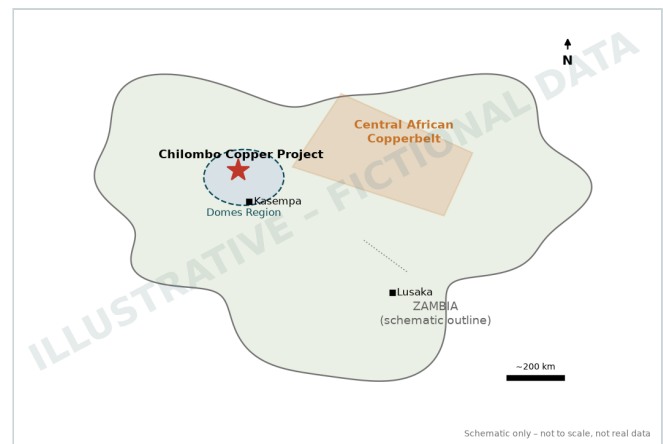

ILLUSTRATIVE FIGURE – FICTIONAL DATA

Figure 3. Location of the Chilombo Copper Project in north-western Zambia

About Copper

Copper is a soft, ductile metal with a distinctive reddish hue and one of the highest electrical and thermal conductivities of any element. Used by people for more than ten millennia, it is today consumed predominantly in power generation and transmission, building wiring, electronics and industrial machinery. Demand is expected to grow strongly through the energy transition: electric vehicles typically contain three to four times more copper than conventional vehicles, and renewable generation, grid expansion and data centres are all copper-intensive. Copper is also widely alloyed to produce brass and bronze for plumbing, coinage and architectural uses.

**APPENDIX 1: Drill collar locations and details for Lwele Central gold re-assay drill holes
(Datum is UTM WGS84 Zone 35S)**

Hole ID	Drill Type	Deposit	DH East	DH North	DH RL	Datum	DH Dip	DH Azimuth	DH Depth (m)
HX23_1	DD	Lwele Central	347751	8578857	1220	UTM WGS84 35S	-70	90	313.45
HX23_4	DD	Lwele Central	347826	8578411	1213	UTM WGS84 35S	-70	90	274.21
LCDD001	DD	Lwele Central	347849	8578509	1213	UTM WGS84 35S	-70	90	173.33
LCDD002	DD	Lwele Central	347950	8578511	1211	UTM WGS84 35S	-70	90	227.61
LCDD003	DD	Lwele Central	347698	8578757	1220	UTM WGS84 35S	-70	90	265.72
LCDD004	DD	Lwele Central	347594	8579053	1226	UTM WGS84 35S	-70	90	460.21
LCDD005	DD	Lwele Central	347791	8578254	1212	UTM WGS84 35S	-70	90	182.12
LCDD006	DD	Lwele Central	347895	8578257	1210	UTM WGS84 35S	-70	90	172.87
LCDD007	DD	Lwele Central	347626	8578934	1224	UTM WGS84 35S	-70	90	460.22
LCDD008	DD	Lwele Central	347650	8578634	1215	UTM WGS84 35S	-70	90	471.87
LCDD009	DD	Lwele Central	347775	8579310	1225	UTM WGS84 35S	-70	90	422.40
LCDD010	DD	Lwele Central	347560	8578710	1220	UTM WGS84 35S	-70	90	385.96
LCDD012	DD	Lwele Central	347500	8578630	1220	UTM WGS84 35S	-70	90	386.92
LCDD017	DD	Lwele Central	347650	8578255	1215	UTM WGS84 35S	-70	90	113.62
LCDD020	DD	Lwele Central	347430	8578315	1214	UTM WGS84 35S	-70	90	244.94
LCDD021	DD	Lwele Central	347590	8578315	1214	UTM WGS84 35S	-70	90	162.74
LCDD022	DD	Lwele Central	347575	8578510	1214	UTM WGS84 35S	-70	90	243.20
LCMT001	DD	Lwele Central	347750	8578623	1217	UTM WGS84 35S	-90	0	273.64
LCMT002	DD	Lwele Central	347712	8579054	1223	UTM WGS84 35S	-70	80	453.17
LCRD001	RCD	Lwele Central	347949	8578857	1214	UTM WGS84 35S	-70	90	271.49
LCRD002	RCD	Lwele Central	347990	8578558	1210	UTM WGS84 35S	-70	90	206.29
LCRD003	RCD	Lwele Central	347918	8579056	1217	UTM WGS84 35S	-70	90	261.98
LCRD004R	RCD	Lwele Central	347610	8578857	1223	UTM WGS84 35S	-70	90	408.08
LCRD005	RCD	Lwele Central	347773	8579162	1223	UTM WGS84 35S	-70	90	454.72
LCRD006	RCD	Lwele Central	347871	8578758	1215	UTM WGS84 35S	-70	90	94.32
LCRD007	RCD	Lwele Central	347699	8578857	1221	UTM WGS84 35S	-70	90	352.10
LCRD008	RCD	Lwele Central	347869	8578709	1215	UTM WGS84 35S	-70	90	203.52
LCRD009	RCD	Lwele Central	347600	8578756	1222	UTM WGS84 35S	-70	90	410.78
LCRD010	RCD	Lwele Central	347650	8578806	1222	UTM WGS84 35S	-70	90	517.50
LCRD011	RCD	Lwele Central	347946	8578408	1210	UTM WGS84 35S	-70	90	187.40
LCRD012	RCD	Lwele Central	347901	8578906	1216	UTM WGS84 35S	-70	90	345.42
LCRD018	RCD	Lwele Central	347853	8578256	1211	UTM WGS84 35S	-70	90	75.09
LCRD019	RCD	Lwele Central	347895	8578257	1210	UTM WGS84 35S	-70	90	55.46
LCRD021	RCD	Lwele Central	347891	8578609	1214	UTM WGS84 35S	-70	90	82.47
LCRD022	RCD	Lwele Central	347868	8578635	1215	UTM WGS84 35S	-70	90	181.95
LCRD023	RCD	Lwele Central	347570	8579156	1228	UTM WGS84 35S	-70	90	627.67
LCRD024	RCD	Lwele Central	347954	8578957	1215	UTM WGS84 35S	-70	90	53.75
LCRD026	RCD	Lwele Central	347467	8579105	1230	UTM WGS84 35S	-70	90	694.58
LCRD027	RCD	Lwele Central	347647	8578710	1220	UTM WGS84 35S	-70	90	111.50
LWDD049	DD	Lwele Central	348132	8578660	1207	UTM WGS84 35S	-60	90	246.97
LWDD054	DD	Lwele Central	347796	8578852	1219	UTM WGS84 35S	-65	90	339.20
LWDD062	DD	Lwele Central	347672	8579001	1223	UTM WGS84 35S	-60	90	490.12
LWDD063	DD	Lwele Central	347792	8578421	1214	UTM WGS84 35S	-70	90	185.36
LWDD064	DD	Lwele Central	347677	8579157	1225	UTM WGS84 35S	-65	90	472.09

APPENDIX 2: Significant drill hole intersections for gold (stated in g/t) and associated copper intersections (Cu%)

Hole ID	Deposit	From (m)	To (m)	Width (m)	Au (g/t)	Cu%
HX23_1	Lwele Central	28.21	30.30	2.09	0.15	0.11
		45.97	49.10	3.13	0.40	0.81
		137.92	141.58	3.66	0.12	0.33
		146.27	149.40	3.13	0.25	0.29
		153.59	155.74	2.15	0.53	0.86
HX23_4	Lwele Central	141.27	143.56	2.29	0.77	0.28
LCDD001	Lwele Central	42.98	51.94	8.96	0.09	0.42
		100.65	108.70	8.05	0.09	0.78
LCDD002	Lwele Central	165.21	175.10	9.89	0.05	0.48
		187.33	189.59	2.26	0.07	0.41
LCDD003	Lwele Central	229.54	235.11	5.57	0.07	0.09
LCDD004	Lwele Central	144.31	150.47	6.16	0.22	0.43
		211.80	216.46	4.66	0.12	0.54
		238.55	241.19	2.64	0.11	0.67
		282.46	286.56	4.10	0.06	0.34
LCDD005	Lwele Central	87.46	91.58	4.12	0.09	0.81
LCDD007	Lwele Central	79.43	80.99	1.56	0.40	0.57
		245.38	249.44	4.06	0.09	0.17
LCDD009	Lwele Central	138.72	140.50	1.78	0.13	0.25
		171.63	173.64	2.01	0.11	0.65
		200.08	201.86	1.78	0.08	0.39
		255.22	260.56	5.34	0.14	0.20
LCDD010	Lwele Central	20.31	27.72	7.41	0.39	0.13
		49.77	52.51	2.74	0.06	0.35
		75.16	79.22	4.06	0.07	0.08
		85.32	92.43	7.11	0.06	0.08
		103.60	107.11	3.51	0.49	0.05
		335.17	342.28	7.11	0.12	0.84
LCDD021	Lwele Central	141.56	146.19	4.63	0.05	1.59
		148.03	149.88	1.85	0.06	0.89
LCDD022	Lwele Central	195.45	201.64	6.19	0.07	0.11
		217.55	218.91	1.36	0.11	1.50
LCMT002	Lwele Central	47.06	48.91	1.85	0.07	0.38
		64.91	66.50	1.59	0.18	0.23
		69.41	73.04	3.63	0.14	0.19
		75.70	97.18	21.48	0.18	0.49
		148.33	155.06	6.73	0.12	0.86
		173.90	175.95	2.05	0.16	0.23
		229.14	235.28	6.14	0.23	0.20
LCRD002	Lwele Central	43.43	45.72	2.29	0.09	0.58
LCRD003	Lwele Central	156.68	158.92	2.24	0.08	0.10
LCRD004R	Lwele Central	391.04	394.94	3.90	0.05	0.99
LCRD005	Lwele Central	187.10	191.52	4.42	0.12	0.47
		369.67	371.94	2.27	0.15	0.18
LCRD006	Lwele Central	28.30	32.07	3.77	0.06	0.55
		66.02	70.74	4.72	0.09	1.54
LCRD008	Lwele Central	52.27	84.52	32.25	0.24	0.44
LCRD009	Lwele Central	47.62	52.69	5.07	0.05	0.42
		361.74	363.77	2.03	0.10	0.56
LCRD011	Lwele Central	142.30	145.18	2.88	0.08	0.27
LCRD012	Lwele Central	41.23	43.46	2.23	0.16	0.24

Hole ID	Deposit	From (m)	To (m)	Width (m)	Au (g/t)	Cu%
		91.96	100.37	8.41	0.11	0.43
		183.86	189.99	6.13	0.09	0.24
LCRD022	Lwele Central	47.73	50.71	2.98	0.07	0.05
		107.10	116.33	9.23	0.12	0.33
LCRD023	Lwele Central	220.27	223.08	2.81	0.13	0.10
		229.90	234.73	4.83	0.27	0.33
		287.64	289.78	2.14	0.18	0.52
		315.44	317.58	2.14	0.11	0.64
LCRD026	Lwele Central	130.74	137.89	7.15	0.06	0.24
LWDD049	Lwele Central	154.69	159.97	5.28	0.07	0.60
LWDD062	Lwele Central	130.01	134.61	4.60	0.22	1.09
		182.93	187.53	4.60	0.49	1.00
		257.71	264.61	6.90	0.11	0.52
		265.77	274.97	9.20	0.11	0.59
		276.12	278.42	2.30	0.20	0.53
		304.88	308.33	3.45	0.11	1.79
LWDD063	Lwele Central	47.74	49.61	1.87	0.12	0.27
LWDD064	Lwele Central	176.66	205.04	28.38	0.18	0.38
		228.61	230.66	2.05	0.10	1.29
		248.09	255.88	7.79	0.08	0.89
		435.70	441.85	6.15	0.06	0.63

Intersections reported at a nominal 0.05 g/t Au lower cut-off, within (mainly) previously reported copper mineralised intervals. Down hole widths are reported; true widths are not known.

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Commentary
Sampling techniques	- Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. - Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. - Aspects of the determination of mineralisation that are Material to the Public Report. - In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	- Halvorsen Resources' Phase 1 and Phase 2 drilling programmes for Lwele Central were aimed at verifying parts of the geological model and the existing Indicated and Inferred Mineral Resource estimates. - Drill holes were completed to sample across the copper (and associated gold/cobalt) mineralisation as close to perpendicular as possible. - Samples were either collected on 1m spacing or separated at defined lithology boundaries. - Diamond drilling (DD) was completed using two track mounted LF90s (driven by a Cummins 6.7L) - drill core size was PQ initially, drilling through the transitional zone normally 55-75m depth, thereafter NQ size core was utilised. - For the Phase 1 RC pre-collaring, a standalone RC drill rig completed holes through the oxide zone, with a Mwila Contracting truck mounted Reger Finley unit, with a 4.5" bit diameter, being employed. - RC chip samples were collected in plastic bags on a one metre basis, weighed, checked for moisture and split using a multi-layered riffle with a reference sample stored and a sample set aside for dispatch to the certified laboratory, ALS Ndola. - Handheld XRF measurements were taken on RC samples, using an Innovx Vanta C with composite sampling conducted on non-mineralised material (cut-off grade <0.1% Cu) and single metre sampling of mineralised material (cut-off grade >0.1% Cu). These composited and single metre samples were then dispatched to the certified laboratory, as required. - Half drill core was initially sampled based on observed copper mineralisation and intervals of one metre or less determined by geological contacts within mineralised units. - Drill core was cut at a consistent distance relative to solid orientation line or dashed mark-up line. - RC and diamond core samples were dispatched in batches to ALS Ndola or Intertek Kitwe, for preparation and blind standard insertion. Samples were dried, crushed to 85% (-5mm), split up to 1.2kg, pulverised to 85% (-75µm). - The pulps were then collected by courier and delivered to SGS Kalulushi for gold analysis. - AAS42S analysis conducted was standard 4-acid digestion (HNO₃/HClO₄/HCl/HF) using a 0.4g pulp. Digestion temperature is set at 200°C for 45 minutes, with AAS finish on bulked up solution to produce Total Cu and Co analyses. - AAS72C "single acid" (5% H₂SO₄ + Na₂SO₃) cold leach using a 0.5g pulp, followed by AAS gives Acid Soluble Cu, Co. - Mixed DD and RC samples were analysed for Au at SGS in batches of about 200 for each job dispatch.

Criteria	JORC Code explanation	Commentary
Drilling techniques	• Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	• Orientation was determined by an Axis Champ Ori Mining orientation instrument. Down hole surveying was via an Axis Mining Technology ChampNavigator North-Seeking Continuous Gyro. • RC drilling in Phase 1 was conducted by Mwila Contracting using a face sampling bit, to drill 25 pre-collars. Diamond drilling in Phases 1 and 2 was conducted by Kafue Drilling Services. Orientation determined by Axis Mining orientation instrument. Down hole surveying is by TruShot TMV7R7.
Drill sample recovery	• Method of recording and assessing core and chip sample recoveries and results assessed. • Measures taken to maximise sample recovery and ensure representative nature of the samples. • Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	• Initial geotechnical logging recording core recoveries and RQD, with recoveries exceeding 95%. • For RC chips, samples were weighed and weights recorded to estimate recovery. • No observed relationship between core loss and grades.
Logging	• Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged.	• For Chilombo, logging of drill core and RC drill chips incorporates the following details: from-to depths, colour and hue, stratigraphy, weathering, texture, structure, structure orientation; type, mode and intensity of alteration and ore minerals, zone type for mineralised rock (oxide, transitional, sulphide), geological notes and % estimate of ore minerals present. • Logging of RC chips was conducted on a metre-by-metre basis whilst for the diamond drill core, criteria for unit boundaries were based on contrasting lithologies, absence or presence of mineralisation; sudden changes of weathering - usually associated with structures, plus changes in major rock forming or alteration minerals such as the presence of large garnets. A guide to core logging was written to provide uniformity of interpretations and consistent data entry. • 100% of all drilling was geologically logged, using standard Halvorsen Resources codes. • All core and RC chip trays were photographed wet and dry, photographs digitally named and re-organised for archival and back up.
Sub-sampling techniques and sample preparation	• If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality, and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results	• For Chilombo, all core was cut with a core saw. Half core sampled in mineralised units; quarter core sampled in non-mineralised units. • RC samples were checked for moisture. If wet or damp they were allowed to dry for several days and then split using a multi-layered riffle. • High quality sampling procedures and appropriate sample preparation techniques were followed. • Several standards (commercial certified reference material (CRM)) were inserted at intervals of 1 in 20 in rotation. Immediately following a standard, a blank was inserted. In total 58 blanks, 162 Au certified CRMs and 111 laboratory duplicates were inserted. • Sample size (approximately 2kg in mass) considered appropriate to the grain size of material being sampled.

Criteria	JORC Code explanation	Commentary
	for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled.	
Quality of assay data and laboratory tests	- The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. - For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. - Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established.	- For the Chilombo Project drilling, certified laboratories (SGS, Intertek and ALS) were used. The AAS techniques are considered appropriate for the type of mineralisation. - A total of 162 Au certified standards, CRMs (Commercial Certified Reference Materials) produced by AMIS of Johannesburg, were inserted at intervals of 1 in 20 in rotation. Immediately following a standard, a blank was inserted. QA/QC was monitored on each batch and re-analysis conducted where errors exceeded set limits. The fourteen different CRMs inserted were AMIS 0622 (0.014g/t Au), AMIS 0623 (0.012g/t Au), AMIS 0695 (0.093g/t Au), AMIS 0696 (0.556g/t Au), AMIS 0774 (0.037g/t Au), AMIS 0795 (0.046g/t Au), AMIS 0844 (0.004g/t Au), AMIS 0845 (0.016g/t Au), AMIS 0873 (0.035g/t Au), AMIS 0846 (0.022g/t Au), AMIS 0847 (0.038g/t Au), AMIS 0881 (5.25g/t Au), AMIS 0923 (1.22g/t Au) and AMIS 0924 (0.398g/t Au). - One CRM with provisional concentration, AMIS 0434 (0.0084g/t Au), was also inserted and one CRM, AMIS 0433 (0.0118g/t Au), with uncertified concentration was used. - For the most recent gold re-assaying of Phase 1 and 2 drilling samples, all the blanks produced satisfactorily low results and all the CRM types lie within 2 standard deviations of the theoretical values. The correlation factor on the 111 fine laboratory duplicates is a creditable 61%. Eight of the results lay beyond acceptable limits and have been marked for "blind" re-assay. It should be noted, however, that these are all low (<0.15g/t Au) sample assays. - In conclusion, the sample preparation procedures at ALS and Intertek, and the accuracy and precision of SGS Kalulushi, are adequate for purpose.
Verification of sampling and assaying	- The verification of significant intersections by either independent or alternative company personnel. - The use of twinned holes. - Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. - Discuss any adjustment to assay data.	- For Chilombo, all the significant intersections and the majority of drill core were inspected by numerous geologists including Halvorsen's Chief Geologist and Competent Person. - All the core from a previous explorer's (ASX-listed) 2011, 2014 and 2021 diamond drilling is stored with a Kitwe-based geological consultancy. - All data has now been transferred to an Access database and migrated to GeoSpark. - No adjustments were made to any current or historical data. If data could not be validated to a reasonable level of certainty, it was not used in any resource estimations.
Location of data points	- Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. - Specification of the grid system used. - Quality and adequacy of topographic control.	57 of the historical drill collars were located and surveyed using DGPS by a Zambian survey contractor. Only seven of the historic holes were not located. Holes from the Phase 2 work were initially located by handheld Garmin GPS. Once the programme is completed, new collars are surveyed by DGPS. The co-ordinate system used is WGS84 UTM Zone 35S.
Data spacing and distribution	- Data spacing for reporting of Exploration Results. - Whether the data spacing and distribution is sufficient to	For Lwele Central the original data spacing was generally 200 metre traverses with 150 metre drillhole spacing, with some traverses having 75 metre drillhole spacing.

Criteria	JORC Code explanation	Commentary
	establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied.	- Additional drilling to a nominal 100 metre traverse by 75 metre drill spacing has been estimated geostatistically as being sufficient to establish geological and grade continuity. - Broadly, Lwele Central drill hole spacing now varies from 35-110m, extending out to 55-110m spacing in more distant parts of the defined copper mineralisation, to increase confidence in the geological and grade distribution. - Samples from within the mineralised wireframes were used to conduct a sample length analysis. The majority of samples were 1m in length. Conventional mining software was then used to extract fixed length 1m down hole composites within the intervals coded as mineralisation intersections. - Current drill spacing and density for Lwele Central is considered sufficient to report to JORC (2012) reportable standards. - Halvorsen Resources' Phase 1 and Phase 2 drilling programmes were focused on expanding the existing Mineral Resource footprint of Lwele Central to the north, south and west.
Orientation of data in relation to geological structure	- Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. - If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	- For Lwele Central, the current drillholes were orientated to intercept normal to the strike of mineralisation and were generally inclined at -70° towards 090°. Mineralisation is interpreted to strike 012° true, dip moderately to steeply to the west (folded) and plunge moderately to the north-northeast. - Due to the dip attitude of mineralisation, 70° inclined drillholes do not intersect the mineralisation completely perpendicular. This is not considered to have introduced any significant bias. - Geological mapping was undertaken at prospect scale to refine the local structural fabric and thus to drill perpendicular to the interpreted deposit's strike.
Sample security	The measures taken to ensure sample security.	- All Chilombo Project RC samples and drill core generated by the Company are stored on site, with historical drill samples held in secure sheds in Kitwe at the geological contractor's facility. - Samples were collected and bagged on site under supervision of the geologist. They were then transported directly to the assay laboratory using sample cages. Once at the assay laboratory the samples were received into the laboratory storage compound before processing.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	- A review was carried out in 2024 by independent environmental and resource consultants, and by an international resource consultancy in January 2026. This provided a series of recommendations, many of which have been adopted. It did not show any material issues with sampling. - In addition, a Copperbelt structural geology specialist undertook a detailed structural investigation of the Lwele Central drill core in March 2025 and November 2025. - The Company's Competent Person for reporting of Mineral Resources and Exploration Targets, Mr Michael Treloar (Treloar Resource Geology), visited site during June 2025 to review QAQC, site, software data storage and laboratory protocols used by Halvorsen at Chilombo. - Numerous visits have also been made by geologists from the Company's strategic partner, a major operator in the region with a strong footing in the north-western Zambian Copperbelt, including at tier-1 Domes Region operations to the northwest and northeast of Chilombo.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	- Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. - The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	- The initial Large Scale Prospecting Licence, 17438-HQ-LPL, for Chilombo (formerly Kabompo West) is located approximately 70km north-northwest of the town of Kasempa, in Kasempa District, North-Western Province, Zambia. The licence was due to expire on 14/08/2018 and was subsequently renewed as Large-Scale Exploration Licence 23615-HQ-LEL on 11/01/2018, which was due to expire on 10/01/2022. - This latter tenement was revoked, and a similar ground position was subsequently covered by 31287-HQ-LEL, initially granted for 4 years to Zambezi Minerals Development Limited (ZMD) on 16/12/2021, expiring on 15/12/2025. - ZMD held 100% of 31287-HQ-LEL (approximately 329 sq km). The licence excludes the northeast portion of the former licence, which incorporated the historic KBW and Chitongo prospects. - Following the signing of the deal on 5 June 2024, HVR acquired 80% of the project from ZMD, with the licence then held under the name Nkwazi Minerals Limited (80% HVR, 20% ZMD). - This was subsequently increased to 87.5% HVR (12.5% ZMD) ownership in March 2026. - On 17 February 2025, two Large-Scale Mining Licences were granted (for 25 years) in the name of Nkwazi Minerals. These licences are 41893-HQ-LML, which covers 176 sq km of the southern portion of the original licence, including Lwele Central, and 41872-HQ-LML, which covers 152 sq km of the northern portion, including West Kasakula and Sampamba. - The licences are in good standing.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	- A state-era Copperbelt mining company (1960s-1970s) completed regional soil sampling, augering, wagon drilling and diamond drilling. Drilling was completed at Lwele Central (drillholes CL295 and CL296). - A European uranium joint venture (1982-1987) undertook systematic regional radiometric traversing, soil and stream sediment sampling, geological mapping, pitting and trenching, largely targeting the uranium potential. No drilling was completed. - A major international copper company (1990s) - soil sampling and drilling. Diamond drilling completed at Lwele Central (drillholes LWU1 and LWU2). - A major-company joint venture (2000-2003) - regional and infill soil sampling, geological mapping and IP/CR/CSAMT geophysical surveys. Three phases of RC drilling, two programmes at Chilombo (CLB00RC001-011 and CLB01RC001-009) and one regional programme (CLB02RC001-007; 012). - A follow-on joint venture (2003-2008) - details unknown, but some drill collars located are presumably from this phase of work. - A previous explorer (ASX-listed) (2011-2021) completed various phases of intermittent RC and diamond drilling, in joint venture with a major copper producer, at the Lwele, Sampamba and Kabompo West (KBW) prospects. - Further drilling and exploration works (including geophysics and geochemical surface sampling) were conducted between 2012 and 2021 on the Lwele (Central, South, East and North), West Kasakula, Sampamba, Kalwanyembe, Mukanga, Sokoshi and Chimbwe prospects by the previous explorer, both internally and under the joint venture. - As part of this work, a geophysical contractor flew a high resolution aeromagnetic and radiometric survey in 2012, which was independently audited. This was accompanied by a detailed Landsat structural interpretation and, in addition, induced polarisation (IP) programmes were initiated with mixed results at Lwele Central and North.
Geology	Deposit type, geological setting, and style of	The style of copper and cobalt mineralisation being targeted is Domes Region style (as at the tier-1 Domes Region operations): structurally

Criteria	JORC Code explanation	Commentary
	mineralisation.	controlled, shear hosted Cu +/- Co (+/- U and Au), developed within interleaved deformed Lower Roan and basement schists and gneisses. The predominant structural trend at Lwele is north-south. Three phases of folding have been identified, with the F1 direction having an NNW plunge. The whole package appears to be hosted by a NNE-SSW trending thrust sheet. Southeast-northwest, and to a lesser extent southwest-northeast, cross-cutting structures have also affected the mineralised system. • There appears to be a preferential supergene concentration of gold within the transitional and possibly oxide zones at the Chilombo Project, although this must be verified by subsequent fire re-assaying analysis.
Drill hole Information	• A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: ◦ easting and northing of the drill hole collar ◦ elevation or RL (Reduced Level – elevation above sea level in meters) of the drill hole collar ◦ dip and azimuth of the hole ◦ down hole length and interception depth ◦ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.	• See Appendix 1 and Appendix 2.
Data aggregation methods	• In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated.	• For the Chilombo Project, the interpreted mineralisation envelopes were based on a nominal 0.2% Cu cut-off grade for low grade material and 0.75% Cu cut-off grade for high grade material, with a minimum down hole length of 2m. • Statistical analysis of the assay values indicated a natural cut-off for low grade at 0.1-0.2% Cu and between 0.65 and 0.85% Cu for high grade. • No upper limit to Cu grades has been applied in oxide; a 2.0% Cu top-cut was applied to transitional materials and a 5.5% Cu top-cut was applied to fresh (sulphide) materials. • No upper limit was applied to Co within oxide/transitional, and a 0.40% Co top-cut was applied to fresh (sulphide) materials. • For gold, no top-cut was applied to oxide/transitional, but a top-cut of 0.7ppm was applied to fresh (sulphide) materials. • For this ASX release, a nominal value of 0.05ppm Au (0.05g/t Au) was used to determine reporting of significant gold intersections within (mainly) pre-existing Cu mineralised wireframes. • All metal grades are being reported as single element (Cu, Co and Au). • Samples from within the mineralisation wireframes were used to conduct a sample length analysis. The majority of samples were 1m in length. • Conventional mining software was used to extract fixed length 1m downhole composites within the intervals coded as mineralisation intersections.

Criteria	JORC Code explanation	Commentary
		Following a review of the population histograms and log probability plots by Treloar Resource Geology, it was determined that the application of high-grade top-cuts was warranted in some instances (see above).
Relationship between mineralisation widths and intercept lengths	- These relationships are particularly important in the reporting of Exploration Results. - If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. - If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	- For Lwele Central, due to the dip attitude of the mineralisation, 70° inclined drillholes do not all intersect the mineralisation completely perpendicular. - Drilling is generally considered normal to strike of the mineralisation at Chilombo, but not completely perpendicular to the dip at all times owing to recumbent folding of rock strata in some instances. - Down hole length is being reported, not the true width.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Location maps are included in the body of the release, where required.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	Aggregate reporting is appropriate since mineralisation is disseminated through the host unit and is considered balanced by the Competent Person.
Other substantive exploration data	Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.	- At the Chilombo Project, coincident IP chargeability anomalies are generally apparent with the copper mineralisation and hence are considered a useful exploration method for targeting copper mineralisation. - This was supported by 2025 downhole geophysical surveying completed by a specialist downhole geophysics contractor, which delineated strong chargeability, high conductivity and low resistivity from the graphitic, kyanite-rich ore schist which hosts the mineralisation at Lwele Central. - A coincident Cu surface geochemical anomaly of ≥ 180ppm Cu is considered anomalous relative to background. - Bulk density information is captured regularly from the diamond drilling programmes at Chilombo. - This data complements the historical measurements completed for Lwele Central by the previous explorer. - Metallurgical test work programmes were conducted by Halvorsen on fresh sulphide and transitional mineralisation from Lwele Central, with encouraging results producing a copper concentrate grade of 24-31% Cu and showing 83-95% Cu recoveries from a coarse grind sizing of 212µm.
Further work	The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).	The Company proposes to undertake an initial Scoping Study (and potentially Feasibility Studies) and seeks to bring the Chilombo Project into commercial copper production as soon as is practicable, if economic to do so.

Criteria	JORC Code explanation	Commentary
	Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.	- Halvorsen will also review all other copper anomalies defined on the existing licences as potential satellite open pit feed options to a central mining and processing facility hub, likely situated proximal to the prospective Lwele series of deposits, which are presently considered the flagship assets at the Project. - Follow up termite hill sampling continues at Induced Polarisation chargeability anomalies at Sokoshi, as required. - Regional exploratory termite hill sampling is also being undertaken at Kalwanyembe, Lwele Northwest, Kasonde, Chimbwe, Kafwila and Mbalango. - Surface geophysical IP surveying was also completed at Chimbwe, Kalwanyembe and Kasonde to follow up anomalous copper geochemistry defined by termite sampling at those prospects. - Three phases of development drilling are planned for Lwele Central, with several of the IP conductive targets (including Sampamba, Lwele South, Lwele North and West Kasakula) targeted during 2025, for approximately 15,600m (diamond and aircore) in total. - The Phase 3 drilling and exploration programmes are currently being finalised, with final design driven by the outcomes of the recently updated Mineral Resource estimates. - Regional targets for 2026 include Mbalango, Sokoshi, Lwele West and Kalwanyembe. - Phase 3 drilling totalling approximately 22,500m of diamond, RC and aircore work is programmed to commence early in May 2026, subject to dry season weather conditions.